



SafeGlow

Emergency Lighting



- 3 Hours Emergency Lighting
- DALI-2 Compatible
- Test & Activation Button
- LED Display for System Status
- IP40 Protection
- High Capacity Li-ion Battery



CONTACT US:

-  lotec.com.tr
-  +90 312 227 03 06
-  info@lotec.com.tr

SEE MORE!






SafeGlow

Emergency Lighting Solution

LOTEC SafeGlow, an Emergency Lighting System designed to provide reliable lighting when you need it most. With its DALI-2 interface, the central management and monitoring is possible. Innovative magnetic type activation switch, test button and led status help maintenance of the system.

Technical Features

- Recessed and Surface Mount Types
- 3 hours of Emergency Lighting
- DALI-2 Compatible
- Test and Activation Button
- Magnetic Type Activation Switch
- LED Indicator for Battery Status
- 3.7V 2200mAh Li-ion Internal Battery
- 100 mA Battery Charging
- 230VAC 50/60 Hz Supply Voltage
- IP40 Chassis
- 155 Lumen Output
- CCT - Color Temperature over 6300 K
- 0° to +35° C Operating Temperature
- Maximum 35 mA Supply Current

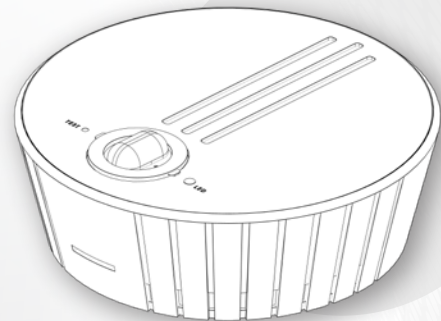

Why SafeGlow

LOTEC SafeGlow is a true source of trust in emergencies. With its cost-effectiveness and robust design, it provides reliable and effective lighting in any setting, creating a secure environment in times of emergency. Also, its advanced DALI interface allows for easy control.



Reliable



Cost Effective &
Energy Efficient



Easy Control with
DALI Interface



Easy Installation &
Maintenance